



REVISION HISTORY		
REV.	DESCRIPTION	DATE
05	REVISED PER LM14240	2016-04-14
A	INITIAL RELEASE PER LM14240	2016-04-21
B	REVISE PER LM14240	2016-05-02



**TOP VIEW**

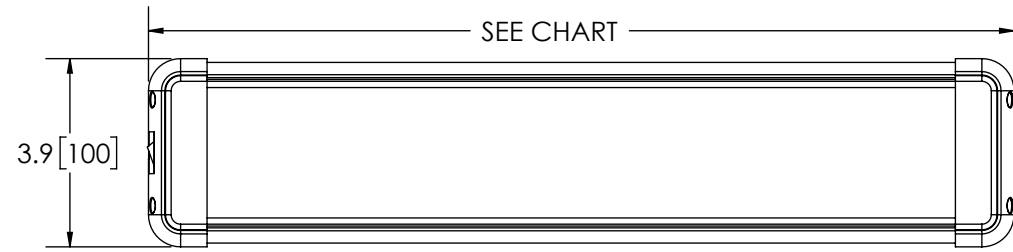

**FRONT VIEW**

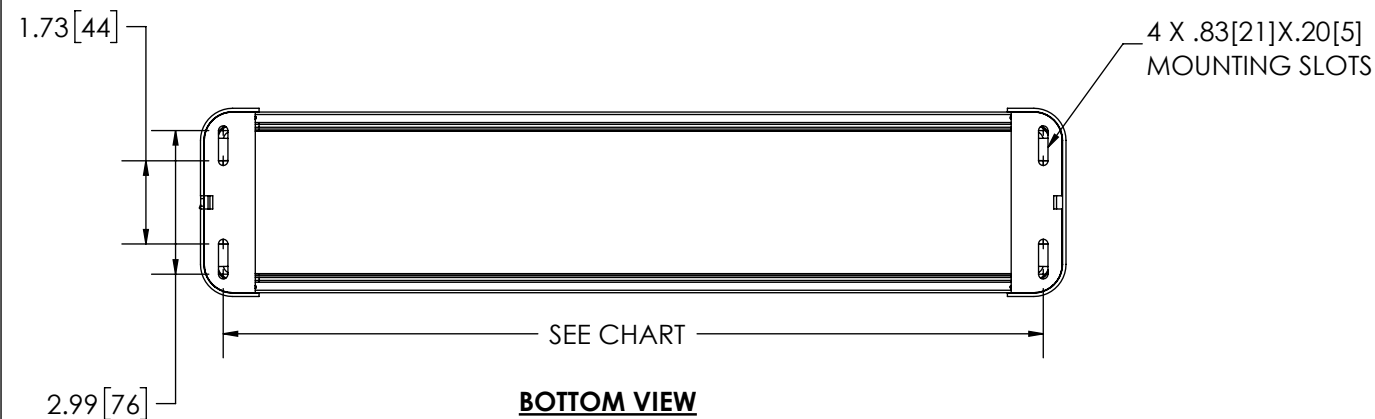

**BOTTOM VIEW**

**SPECIFICATIONS**

- CERTIFICATIONS: **CE**;  
 Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- RAW LUMENS: SEE CHART
- EFFECTIVE LUMENS: SEE CHART
- ILLUMINANCE: lux
- PEAK BEAM INTENSITY: Candela
- EFFICACY: lm/W
- CORRELATED COLOR TEMPERATURE: 6440K
- VOLTAGE (NOMINAL): 12 to 24 VDC
- VOLTAGE (EXTREME): 9.0 to 32.0 VDC
- CURRENT (PEAK): SEE CHART (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): SEE CHART (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: 2 - 16 AWG WIRES
- MOUNTING:
- HOUSING MATERIAL: ALUMINUM
- LENS MATERIAL: ACRYLIC
- PRODUCT WEIGHT: SEE CHART

FGS PRODUCT CHART					
FGS. NO.	CURRENT PEAK (AMPS)	MAX POWER (WATTS)	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT(LBS)
EW0600	1.13	14.5	1440	1380	1.4
EW0601	1.96	25.1	2880	2760	1.9
EW0602	2.26	28.9	3840	3680	2.5


MOUNTING DISCLAIMER:  
 MOUNTING MEASUREMENT IS FOR REFERENCE ONLY, MEASURE BEFORE DRILLING.

LENGTH, WIDTH AND MOUNTING CHART		
FGS. NO.	LENGTH	MOUNTING SLOT DISTANCE
EW0600	18.1[459]	17.20[437]
EW0601	25.9[657]	25.00[635]
EW0602	33.8[857]	32.85[835]

- NOTES:
- FOR INTERIOR USE ONLY
  - ROHS COMPLIANT
  - DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

DISCLAIMER:  
 DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

NON DISCLOSURE AGREEMENT  
 THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ESG AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ESG. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2016 ECCO

SCALE 1:4	APPROVALS	DATE	 www.eccolink.com Americas (800) 635-5900   Europe +44 (0)113 237 5340   Asia Pacific +61 (0)3 63322444
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED:A	DRAWN BY ABD	2016-04-26	
	CHECKED MDH	2016-04-27	
	MECH. ENG. JLA	2016-04-26	
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE: MILLIMETERS DECIMALS INCHES DECIMALS ANGLES XX. ± 1.0mm X.X ± 0.1 ° XX.X ± 0.5mm X.XX ± 0.04 ° X.XXX ± 0.02 ° FRACTIONS ± 1/64	ELEC. ENG. TJT	2016-04-26	
	TEST ENG. JRT	2016-04-26	
	SALES. JPT	2016-04-27	
THIRD ANGLE PROJECTION			CUSTOMER PART NO. <b>SEE CHART</b>
Electronically Controlled Use Latest Copy		SIZE: B DWG. NO. EW06XX SHEET 1 OF 1 Project: LM14240 Date Created: 2016-03-15	PRODUCT SERIES: REV. B