

Ultimate Duty Spring Retractable Reels

Air/Water/Oil - 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2" I.D.


- Ideal for service trucks, permanent service, or plant work areas
- Substantial base frame – full width frame has the greatest amount of mounting area and overall strength of reels within its class
- Latch and ratchet are made of heavy duty cast aluminum to limit the opportunity for premature wear
- Reels are shipped in the bottom wind position with right hand inlet; see Hose Guide Roller Position for other options



E9350 OLPBW

****Series G9000 reels have an external drive spring and a removable gooseneck.**

	Size Index									
	1		2		3		4		5	
	in	mm	in	mm	in	mm	in	mm	in	mm
A	26 3/8	670	26 3/8	670	26 1/4	667	26 1/4	667	26 3/8	670
B	26 1/4	667	26 1/4	667	25	635	25	635	26 1/4	667
C	22 1/4	565	21 15/16	557	22	559	22	559	22 1/4	565
D	7 3/4	197	7 3/4	197	8	203	9 1/2	241	13 1/2	343
E	12	305	13 3/8	340	17 1/4	438	17 1/4	438	17 3/4	451
F	24 1/8	613	24 1/8	613	24 1/4	616	24 1/4	616	24 1/8	613
G	4 3/4	121	4 1/2	114	3 7/8	98	3 7/8	98	3 7/8	98

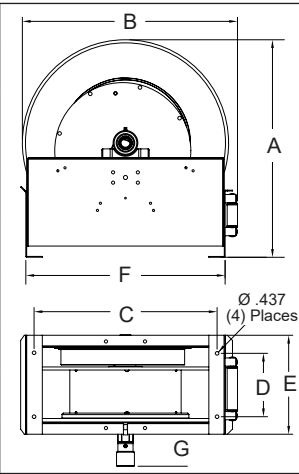

Model with hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Max Pressure		NPT(M) Hose Outlet	NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in	
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) Max working pressure is at 70 °F (20 °C)														
E9299 OLPBW	127	58	1/2	13	.750	19	100	30	300	21	1/2	1/2	1/2	1
E9350 OLPBW	140	64	3/4	19	1.075	27	50	15	250	17	3/4	3/4	3/4	1
E9375 OLPBW	152	69	3/4	19	1.075	27	75	23	250	17	3/4	3/4	3/4	1
E9399 OLPBW	143	65	3/4	19	1.075	27	100	30	250	17	3/4	3/4	3/4	2
E9450 OLPBW	157	71	1	25	1.375	35	50	15	250	17	3/4	1	1	1

Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)														
E9275 OMPBW	131	59	1/2	13	.820	21	75	23	3000	207	1/2	1/2	1/2	1
E9350 OMPBW	142	64	3/4	19	1.188	30	50	15	1250	86	3/4	3/4	3/4	1

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100R17 (1/2") OR S.A.E. 100R1-AT (3/4") one wire braid hose.

Model without hose & bumper	Shipping Weight		Hose Capacity			Max Pressure	NPT(F) Reel Inlet	NPT(F) Reel Outlet	Size Index #				
	lbs	kg	I.D.	O.D.	Length								
Low Pressure Air/Water Reels Maximum Temperature 210 °F (99 °C)													
E9200 OLPBW	115	52	1/2	13	.750	19	75	23	500	35	1/2	1/2	1
E9305 OLPBW	115	52	3/4	19	1.075	27	100	30	500	35	3/4	3/4	2
E9400 OLPBW	115	52	1	25	1.375	35	50	15	500	35	1	1	1
G9600 OLPBW	157	71	1 1/2	38	2.000	51	50	15	600	41	1 1/2	1 1/2	4

Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)													
E9200 OMPBW	117	53	1/2	13	.820	21	75	23	3000	207	1/2	1/2	1
E9300 OMPBW	117	53	3/4	19	1.188	30	50	15	3000	207	3/4	3/4	1
G9300 OMPBW	160	73	3/4	19	1.188	30	75	23	3000	207	3/4	1	3
E9400 OMPBW	120	54	1	25	1.480	38	50	15	3000	207	1	1	1
G9400 OMPBW	159	72	1	25	1.480	38	75	23	3000	207	1	1	3

Additional Series 9000 Models


S.S. Fluid Path - Page 18

Stainless - Page 19

Fuel/DEF - Page 20-21

Twin Hydraulic - Page 22

Hose Guide Roller Position

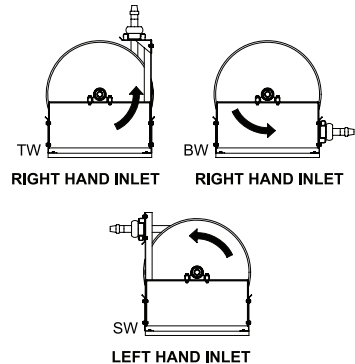

Reels are shipped in the bottom wind (BW) position. Kits are available for top wind (TW) and side wind (SW) position. Contact Reelcraft for more information.



Interactive Reel Catalog

Visit reelcraft.com/catalog for complete product specifications, parts, and accessories.



Hose Assemblies & Bumper Stops

See page 40