

This all-purpose flashlight is designed for the broadest range of lighting needs at the best value. Now producing 425 lumens for three hours!



Four operating modes:

- High for a high lumen, far-reaching beam: 425 lumens; 26,000 candela; 322m beam; runs 3 hours
- Medium for bright light and longer run time: 200 lumens; 12,000 candela; 219m beam; runs 5.5 hours
- Low provides a less intense beam and extended run time: 100 lumens; 6,000 candela; 155m beam; runs 10 hours
- Strobe for disorienting or signaling: runs 7.5 hours

Optimized electronics provide regulated intensity

IPX4 water resistant; 1m impact resistance tested

Serialized for positive identification

Stinger LED: 8.41" (21.36 cm); 12.4 oz. (352 g)
 Stinger DS LED: 8.85" (22.48 cm); 12.8 oz. (364 g)

Limited Lifetime Warranty
 Visit www.streamlight.com for full warranty information

See reverse for system configurations

PART NBR	ITEM DESCRIPTION
STINGER LED	
75962	STINGER LED - 230V AC/12V DC - 2 HOLDERS
75729	STINGER LED - 240V AC/12V DC - 2 HOLDERS
75718	STINGER LED - 100V AC/12V DC - 2 HOLDERS
75713	STINGER LED - 120V AC/12V DC SMART CHARGE - 2 HOLDERS
75711	STINGER LED - 120V AC SMART CHARGE
75712	STINGER LED - 12V DC SMART CHARGE
75732	STINGER LED - 120V/100V AC/12V DC PIGGYBACK SMART CHARGE
75710	STINGER LED - (WITHOUT CHARGER)
STINGER DS LED	
75972	STINGER DS LED - 230V AC/12V DC - 2 HOLDERS
75829	STINGER DS LED - 240V AC/12V DC - 2 HOLDERS
75818	STINGER DS LED - 100V AC/12V DC - 2 HOLDERS
75813	STINGER DS LED - 120V AC/12V DC SMART CHARGE - 2 HOLDERS
75866	STINGER DS LED- 120V AC/12V DC 1 HOLDER SMART CHARGE - CLAM
75811	STINGER DS LED - 120V AC SMART CHARGE
75812	STINGER DS LED - 12V DC SMART CHARGE
75832	STINGER DS LED - 120V/100V AC/12V DC SMART CHARGE PIGGYBACK
75810	STINGER DS LED (WITHOUT CHARGER)



STINGER® LED or STINGER DS® LED RECHARGEABLE FLASHLIGHT
MARKET
APPLICATIONS: Law Enforcement, Sporting Goods, Security, Fire & Rescue, Hardware/Tool, Automotive, Industrial, Consumer

DESCRIPTION:

Compact & extremely powerful, the Stinger® LED and Stinger DS® LED rechargeable flashlights offer 3 microprocessor controlled intensity modes, strobe mode and the latest in power LED technology. The Stinger DS® LED includes a second independent easy to locate tactical tailcap switch. The combination of rechargeable batteries and the C4® LED results in one of the lowest operating costs of any flashlight made.

CASE MATERIAL:

6000 series machined aircraft aluminum with non-slip rubberized comfort grip with anti-roll rubber ring.

DIMENSIONS:

 Stinger® LED Length: 8.41 in. (21.36 cm) Diameter: Major Diameter: 1.62 in. (4.11 cm)
 Stinger DS® LED Length: 8.85 in. (22.48 cm) Body Diameter: 1.17 in. (2.97 cm)

WEIGHT:

Stinger® LED: 12.4 oz (352 grams)* Stinger DS® LED: 12.8 oz (364 grams)*

LENS:

Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

LIGHT SOURCE:

High power LED, white, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT:

See Chart. Optimized electronics provide regulated intensity. Deep-dish parabolic reflector produces a concentrated beam with optimum peripheral illumination.


ON/OFF:

Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations. Stinger DS® LED provides a second multi-function push-button tactical tailswitch where both switches offer full feature control independent of each other.

RUN TIME:


See Chart. All claims to 10% of initial lumen output. Strobe: 7.50 continuous hours.

BATTERY:

3-cell, 3.6 Volt, 2.6Ah NiMH sub-C battery, rechargeable up to 1000 times.

CHARGE HOLDERS:

 Fits existing Stinger® chargers and new Smart chargers.
 Steady charger: Fully recharges within 16 hours.
 Smart charger: Fully recharges within 4.5 hours (5V/1A USB input) or 3 hours (12VDC input).
 Smart PiggyBack® charger: Fully recharges within 7.5 hours (5V/1A USB input) or 4 hours (12VDC input).

CHARGE CORDS:

Streamlight universal AC input voltage, 5V/1A USB or 12.7V/.8A output charge cords available with IEC Type A (US & Japan), Type C (Euro), Type G (UK) or Type I (Australia) plugs. 12VDC cigarette lighter or direct wire automotive cords.

FEATURES:

 High power LED for extreme brightness.
 IPX4 Rated for water resistant operation.
 1 meter impact resistance tested.
 Serialized for positive identification.
 LED Charge-continuity indicator on charger base.
 Compact, snap-in charger mounts in any position.

WARRANTY:

Streamlight's Limited Lifetime Warranty.


APPROVALS:

 CE Meets applicable European Community Directives.
 (BC) CEC Compliant (Smart charger models only)

OPTIONAL ACCESSORIES:

Safety wands, ring holder, holster, color filters, 2.6Ah Li-Ion battery, 5-unit bank charger, Smart charger, Steady charger or Smart Piggy-Back® charger that allows for simultaneous charging of light and battery.

	FL 1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT	425 LUMENS	200 LUMENS	100 LUMENS	
RUN TIME	3h	5h 30min	10h	
DISTANCE	322m	219m	155m	
INTENSITY	26,000cd	12,000cd	6,000cd	

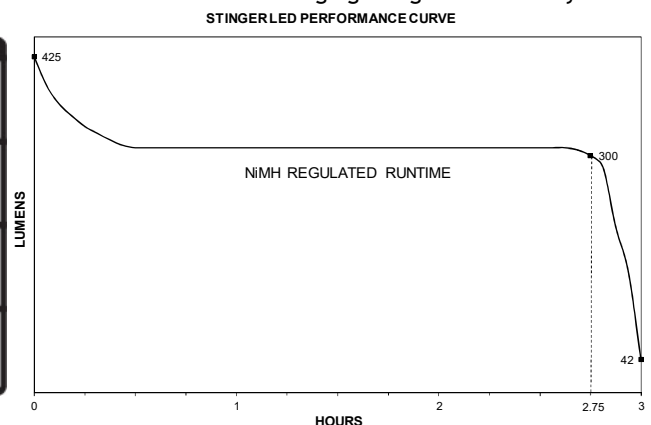

*With battery (included in purchase)

All performance claims to ANSI/PLATO FL1-2016 Standard

Issued: 10/13/2006

Revised: 05/08/2019 Rev: 11

Engineered in the USA, manufactured in China

Document #201