U-Joint Puller

10104



Have What It Takes

Safety Warning

Read all instructions and safety warnings prior to operation. Failure to do so could result in equipment damage, personal injury or even death.

CAUTION: DO NOT USE OVER 1/2" IMPACT WRENCH. DOING SO WILL VOID WARRANTY.

- Stay Alert! Watch what you are doing and use common sense when operating this tool.
- Inspect product for damage prior to using; do not use if product is in unsafe condition.
- Do not operate tool while under the influence of drugs, alcohol or medication.
- Always use safety equipment to prevent injuries. Approved face and eye protection must always be worn by the operator, as well as others in the work area.
- Do not overreach. Keep proper footing and balance at all times.
- Dress properly. Do not wear loose clothing or jewelry.
 Keep your hair, clothing and gloves away from moving parts.
- Keep your work area clean and well lit.

NOTE: HAMMERING THIS TOOL WILL VOID YOUR WARRANTY.


Operating Instructions

- Remove all bolt retainers from bearing cups.
- 2 Slip the U-Joint Puller over the yoke of the driveline.
- 3 Turn the tool's forcing screw clockwise with either an air or hand wrench. (Note: reverse thread)
- Once the bearing cup is free, rotate driveshaft and remove the opposing bearing cup. Remove the remaining two bearing cups using the same method.

Preventative Maintenance

Keep forcing screw clean and lubricated at all times. Lubricate load bearing surface in glove, under cap. We recommend SAE 30 lube for the threads and EP molly grease.

Here at Tiger Tool, your satisfaction is our number one priority. Should you have any questions about this or any of our products, please call us at 1.800.661.4661.

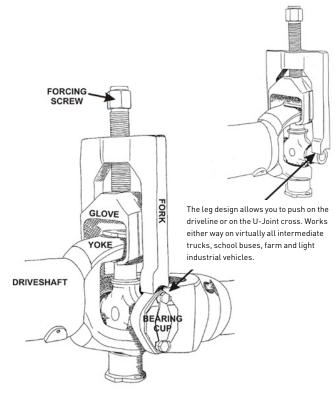


U-Joint Puller

10104



Parts Breakdown





Item No.	Part Number	Description	Qty.
1	10104-1	Fork	1
2	10104-2	Glove	1
3	10104-4	Forcing Screw	1
4	10104-5	Dome Plug	1
5	10104-6	External Snap Ring	1