


REVISION HISTORY		
REV.	DESCRIPTION	DATE
В	UPDATED TO CURRENT CAD STANDARDS PER CR# 1911	2005-04-12
С	UPDATED TEMPLATE PER CR# 2785	2008-11-13
D	REVISED PER	2019-11-06




## **SPECIFICATIONS**

1. CERTIFICATIONS: NONE

Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.

- 2. MAX. LOAD: 2.0 A
- 3. VOLTAGE (NOMINAL): 12 to 24 VDC
- 4. VOLTAGE (EXTREME): 9.0 to 32.0 VDC
- 5. CURRENT (NOMINAL): 0.5 A
- 6. POWER (NOMINAL): 4.8 W
- 7. CONNECTION: 4-16 AWG WIRES
- 8. RECOMMENDED MOUNTING: ECCO SUPPLIED MOUNTING HARDWARE
- 9. HOUSING MATERIAL: LOCKTITE RESIN 10207 W/161 HARDENER OR EFI POLYMERS 11G203-20203 W/ HARDENER 7H015-50201
- 10. PRODUCT WEIGHT: 2.0 LBS

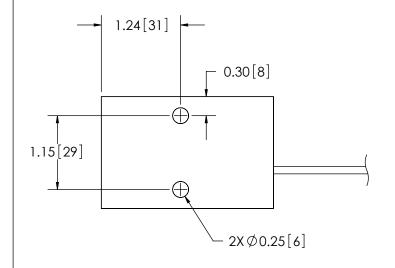

## NOTES:

## 1. DIMENSIONS IN INCHES[MILLIMETERS(FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES "ECCO") AND IS SISUED IN CONTRIBUCED TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE LUED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIS PARTIES OR LUED FOR ANY OTHER PURPOSE WITHOUT PROPERCY OWNITION CONSTRUCTED AND SALE SIGNATING THE PURPOSE WITHOUT PROPERCY OF THE PURPOSE WITHOUT PROPERCY OF THE PURPOSE WITHOUT PROPERCY AND THE PURPOSE WITHOUT PROPERCY OF THE PURPO

