


12V

3Ah

NLP9

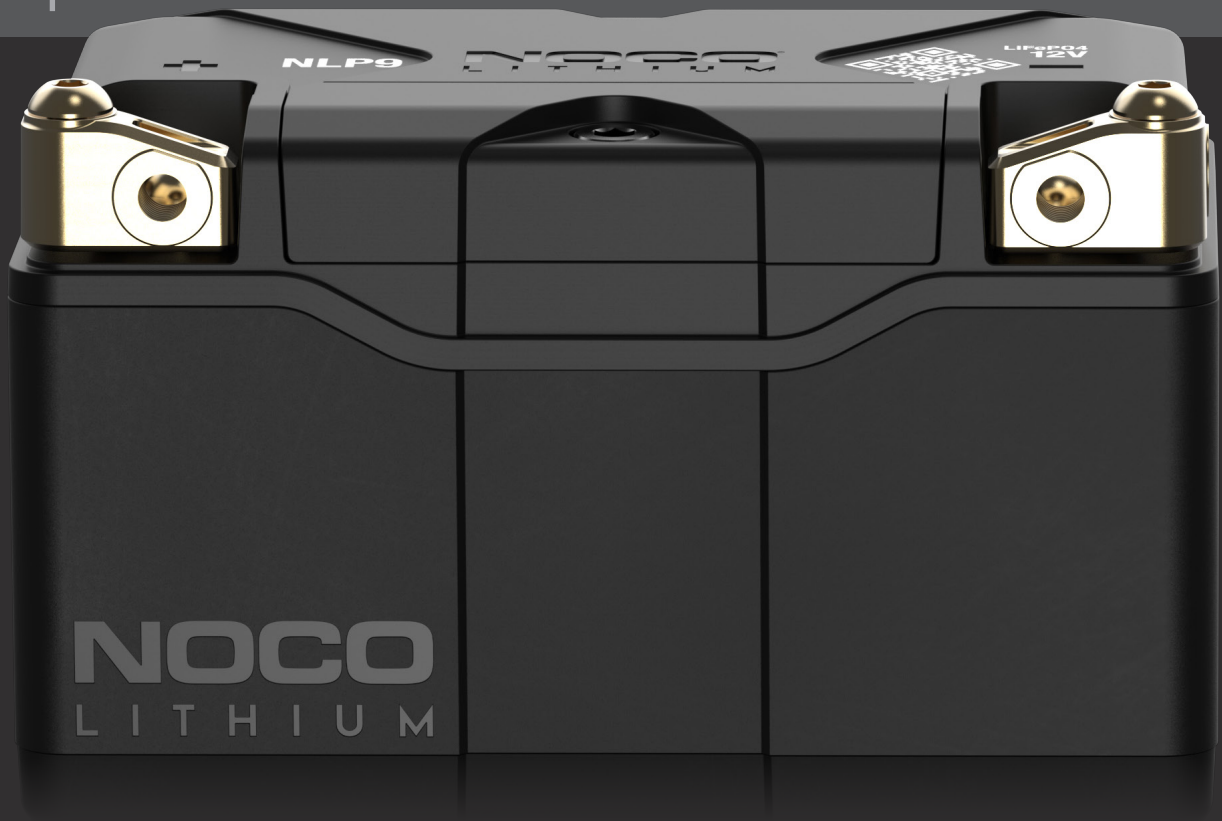

INSANE PERFORMANCE. LITHIUM POWERSPORT BATTERY.™

2X

MORE POWER.

10X

MORE STARTS.

5X

LONGER LIFE.

DYNAMIC BMS.

Equipped with an auto-enabled, advanced battery management system that provides maximum protection, performance, and bi-directional cell equalization for long-lasting stability. No BMS reset needed.

ACTIVE PROTECTION.

Protects against over-charge, extreme-heat, short-circuit, over-discharge, extreme-cold, and over-current.

SHOCK ABSORPTION.

Designed with a custom rubber dampening base and foam inserts to extend the life of the battery and keep connections secure.



NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co


NOCO
LITHIUM

NOCO

UNIVERSAL MOUNTING.

Modular spacers can be added to alter the size and allow the battery to be safely and securely mounted. A removable mounting block allows the battery to fit more applications. The threaded insert enables direct-mounting for additional simplicity and security.

Removable Mounting Block
Threaded Insert
Hex Screw M6-1x20mm
M6-1 Thread Size.

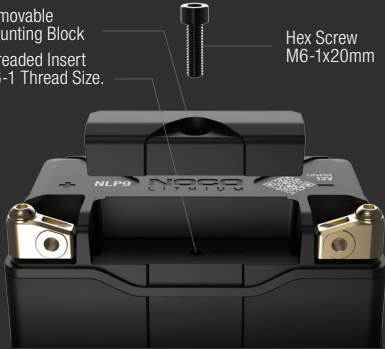

FEMALE.



SIDE.



TOP.



FRONT.



MULTI-CONNECTION TERMINALS.

Equipped with premium IP66 waterproof copper PCB plates. NLP Terminals can be mounted from the front, side, or top, and can be removed altogether depending on the application.

COMPATABLE SIZES.

BCI SIZES

BTX7A-BS
BTX9-BS
BTR9-BS
BTX5L-BS
BTX7L-BS
BTZ5S

YUASA SIZES

YTX9
YTX7A-BS
YTX9-BS

ETX SIZES


ETX9



NLP9 Battery

12.5mm Spacer

WHAT'S IN THE BOX

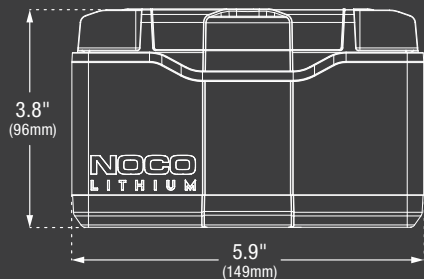

LxWxH Minimum.

5.9" x 3.4" x 3.8"
(149mm x 87mm x 96mm)

LxWxH Maximum.

5.9" x 3.4" x 4.3"
(149mm x 87mm x 108.5mm)

*Accessories not to scale with NLP9

M6 Hex Screw
1mm x 8mm



M6 Hex Screw
1mm x 16mm



M6 Hex Screw
1mm x 10mm




Hex Key



User Guide



(1) 0.5" 12.5mm Spacer

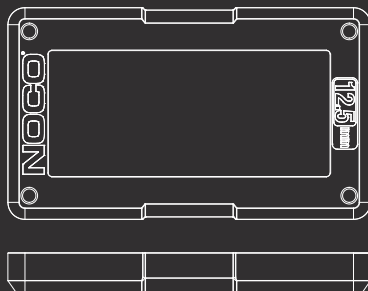

RAPID RECHARGE.

Use the Lithium mode on a Genius charger to fully recharge an NLP battery in minutes. See Genius models and charging times below.

RECHARGE TIME

GENIUS1	180 Minutes
GENIUS2	90 Minutes
GENIUS5	36 Minutes
GENIUS10	N/A

TECHNICAL SPECIFICATIONS

BCI SIZE:	9	
CHEMISTRY:	Lithium Iron Phosphate (LiFePO4)	
NOMINAL VOLTAGE:	12.8	
AMP-HOURS:	3	
WATT-HOURS (WH):	38.4	
STARTING CURRENT:	400	
CHARGING VOLTAGE (V):	14.6V	
CHARGING CURRENT (A):	9A (Max)	
OPERATING TEMPERATURE:	-20°C to 60°C	
CHARGING TEMPERATURE:	-10°C to 50°C	
STORAGE TEMPERATURE:	-20°C to 60°C	
WEIGHT:	2.29 lbs (1.03 kg)	
VOLUMETRICS:	Retail Packaging: Dimensions: 6.18" x 4.84" x 4.77" Weight: 3.17 lbs UPC: 0-46221-19008-3	Master Carton: Dimensions: 13.50" x 6.18" x 10.63" Weight: 15.93 lbs Quantity: 6 UCC: 10046221190080
	Inner Carton: Dimensions: 6.02" x 4.37" x 5.04" Weight: 2.56 lbs	Units Per Pallet: 324 Units

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

