

# SYLEDRC SERIES - RECHARGEABLE WORKLIGHT

## Illuminator®

### SYLEDRC SERIES

#### Specifications:

- Voltage: 12-36VDC
- Light Source: 5 LEDs (600), 6 LEDs (1400)
- Light Output: 600 Lumens (600), 1400 Lumens (1400)
- Output: 15W (600), 18W (1400)
- Current Draw: 1A @ 12VDC, 0.55A @ 24VDC
- Beam Pattern: 30°/60°/90°
- Housing: Die-Cast Aluminum Alloy
- Size: 3.3"H x 3.3"L x 1.5"D (SYLEDRC-600 Light Only)  
7.45"H x 4.5"L x 3.9"D (SYLEDRC-600 Base & Light)  
3.1"H x 3.8"L x 2.5"D (SYLEDRC-1400 Light Only)  
7.45"H x 4.5"L x 3.9"D (SYLEDRC-1400 Base & Light)
- Lens: Polycarbonate
- Mount: Magnetic
- Warranty: 1 Year

#### Features:


- 3 Settings: High Beam; Low Beam; Warning (S.O.S. Signal)
- Charging Time: 7.5 Hours
- Life Span of Battery: Lasts up to 500 Charges
- Low Power Dissipation for an Extended Lifespan
- Maximum Running Time: 3-4 Hours at Maximum Brightness
- Rechargeable Lithium Battery
- Includes: Cigarette Plug Adapter, AC Power Adapter

#### Certifications:

- IP67




SYLEDRC-600

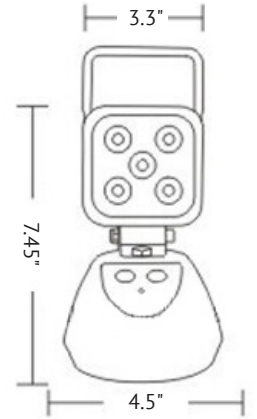

PART #	DESCRIPTION
SYLEDRC-600	Rechargeable 600 Lumen LED Worklight with Magnetic Base
SYLEDRC-1400	Rechargeable 1400 Lumen LED Worklight with Magnetic Base



SYLEDRC-1400

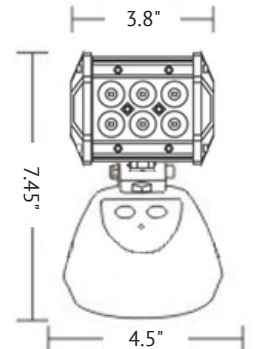

### APPLICATIONS:



US: 16355 South Lone Elm Road • Olathe, KS 66062 • USA  
Canada: 1039 Cardiff Blvd. • Mississauga, Ontario L5S 1P4 • Canada

P: 913-780-1440 • TOLL FREE 800-447-3693 • F: 913-780-1427  
E: [info@superiorsignals.com](mailto:info@superiorsignals.com) • [www.superiorsignals.com](http://www.superiorsignals.com)