

PRO-LOK

Why Use Anything Else?



A021

Toyota Tool

The A021 is a double-ended tool consisting of an "L" on one end and a modified "U" on the other.

The modified "U" end of the tool is very effective on a variety of Toyota products. The working principle of the A021 is to defeat the metal or plastic shield which surrounds the bell crank and latch area on various Toyota models (see photos 1-3.)

To open a Toyota with latch shielding, gently wedge the weatherstrip away from the window glass and insert an inspection light.

Identify the shield surrounding the latch, at the rear of the front door.

Insert the A021 and lower it down into the door cavity.

Maneuver the tip of the tool beneath the latch shield, where it is unprotected.

A bell crank is located in this open area.

Lift the tip of the tool to contact the bell crank.



Once the button moves, lift gently to unlock the door (see photos 1 & 2.)

The "L" end of the A021 may be used to activate exposed bell cranks.

To use, gently wedge the weatherstrip away from the window glass.

Insert an inspection light and identify the exposed bell crank.

Manipulate the bell crank in the direction required to unlock the door (see photo 3.)

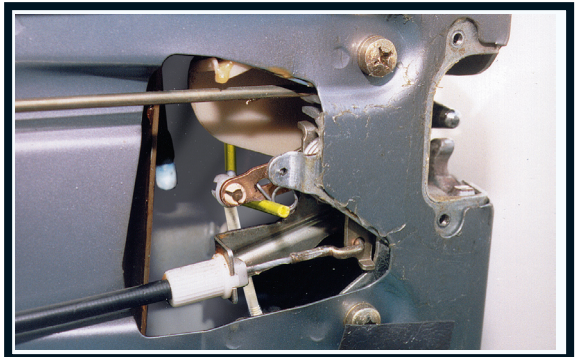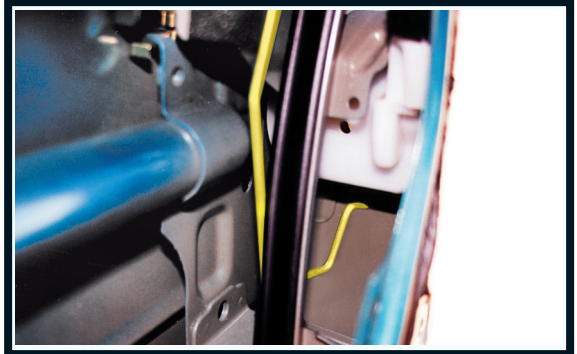

GENERAL APPLICATIONS: *This tool works on vehicles with various linkage systems found on some: ACURA, BUICK, CHEVROLET, FORD, INFINITI, JAGUAR, MERCEDES, MERCURY, OLDSMOBILE, PONTIAC, TOYOTA, VOLKSWAGEN and various other models.*