

6021AGM

5043 Farlin Ave
St. Louis, MO 63115
www.associatedequip.com


6/12/24 Volt HD Fleet Charger/Analyzer
Battery Tester & Charger In One!
Safe for AGM & EFB Batteries



Digital Meter:
Amps, Volts,
Time, Mode

Dead Battery
Override

Charge Voltage
Selector Switch

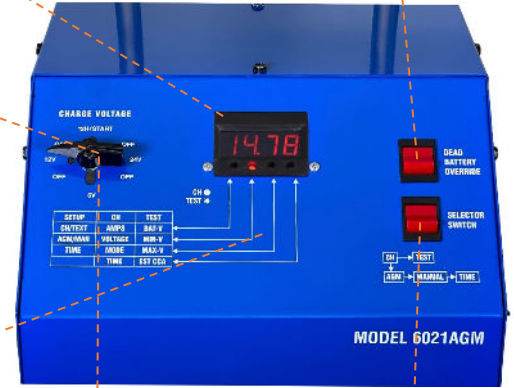

AGM/EFB
Specialty Charge
Mode

Battery
Charge/Test
Selector Switch

205A Boost

MADE IN USA
OF U.S. AND IMPORTED PARTS
★★★★★

400A Vinyl
Coated
Clamps

ECO FRIENDLY
ENERGY EFFICIENT



Safe in Any
Weather

UL or CSA Continuous Rating	Crank Assist	Operating Charging Voltage	Battery Types	Indoor/Outdoor	DC Cable Length and Gage	Clamp Rating	A/C Cord Length	Weight (Lbs)	Dimensions (LxWxH)
70/65/30A	205A	6/12/24V	SLA/AGM/EFB	Yes	6.5' 4AWG	400A	6.5' 120VAC	56	17.25x16.5x26.5

5043 Farlin Ave
St. Louis, MO 63115
www.associatedequip.com

6/12/24 Volt HD Fleet Charger/Analyzer
Battery Tester & Charger In One!
Safe for AGM & EFB Batteries

Product Specifications and Features

- Battery Charger
 - 6/12/24V Wheeled Charger/Analyzer
 - 70/65/30 Charging Amps
 - 205 Amp Crank Assist
 - Digital Meter: Amps, Volts, Time, Mode
 - Dead Battery Override Switch
 - Manual Mode w/Adjustable Digital Timer (5-180 Minutes)
 - Overcurrent & Wrong Voltage Setting Safety Features
 - 6 Volt Charge Setting Used For 12 Volt Float Mode at 13.3 Volts
- AGM/EFB Specialty Charge Mode
 - Battery Fault Indicator
 - Auto Restart in AGM setting
- Battery Tester
 - Automated Load Test
 - Automatic Surface Charge Removal
 - Battery Out of Parameter Notification & Override Capability During Load Testing
 - Displays Active Voltage, Max-Voltage, Min-Voltage, Approximate CCA

Specifications

Model Number	6021AGM
Battery Types	SLA, AGM, EFB
Display	Digital - LED
Display (during battery test)	Active Voltage, Max-Voltage, Min-Voltage, Approxomite CCA
DC Leads	6.5' 4AWG Dual Extruded
Clamp Rating	400 A
AC Cord	6.5' 16-3
Power Requirements and Consumption	12A 120VAC 60Hz
Charger Output	70/65/30
Industry Approval	cCSAus
Limited Warranty	Two-year Parts/Labor - Five Years Transformer/Rectifier
Country of Origin	MADE IN USA of US and Global Components
UPC	0 99684 00731 3
HTC	8504.40.9550
Shipping Dimensions	17.25 X 16.5 X 26.5
Weight	56 LBS



6006AGM

+



6033

=

6021AGM