

PRO-LOK

Why Use Anything Else?



A020

Slide - Jim Tool

The A020 Slide-Jim Tool is a double-ended tool with a "L" on one end and a squared "U" on the other. The "L" end is used to manipulate bell cranks.

The "U" end is used to manipulate horizontal linkage rods with a "stepped" or offset angle.

To use, gently wedge the weatherstrip away from the window glass.

Insert an inspection light and identify the horizontal lock-unlock rod.

Insert the A020 and lower it down into the door cavity, beneath the horizontal rod.

Rotate the tool 45° to 90°.

Lift the tool to contact the step or bend in the rod.


Rotate the tool clockwise to travel the rod forward and unlock the door (see photos 1-3.)

The "L" end of the A020 may be used to activate exposed bell cranks.

To use, gently wedge the weatherstrip away from the window glass.

Insert an inspection light and identify the exposed bell crank.

Manipulate the bell crank in the direction required to unlock the door.

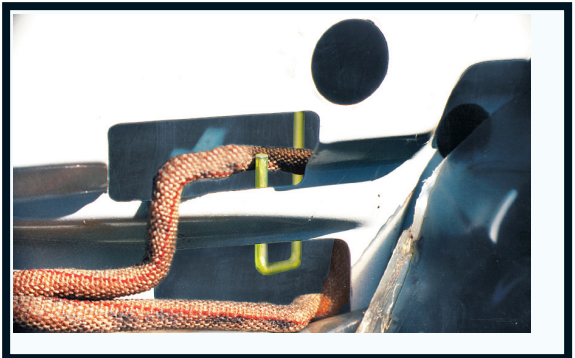

GENERAL APPLICATIONS : *This tool works on vehicles with various linkage systems found on some: GENERAL MOTORS, MERCURY, NISSAN, TOYOTA and various other models.*