

RESCUE[®]

Portable Power Pack


PRODUCT SPECIFICATIONS

12V/24V
Dual Voltage/Commercial
with Polarity & Voltage Protection


Model
2100

Part No. 604063-001

Tough Enough for 24V Equipment



- 12/24V power
- Dual 12-Volt 20AH high output AGM batteries
- 4000 12V peak amps
- 1800 24V peak amps
- Built-in, 1 amp internal charger
- 2 gauge 62" 100% copper cables
- Digital battery voltage gauge reads internal and external
- 12V power outlet
- Work light and flasher
- Battery charging status
- Professional quality
- Unit will not operate if polarity or voltage is set incorrectly
- USB power outlet



The Rescue 2100 has dual 12/24 volt capability.



Easy to carry and use.



Has flashing safety light.

QUICKHOWTO.COM

See series of videos on using RESCUE Portable Power Packs

RESCUE[®]

Portable Power Pack

PRODUCT SPECIFICATIONS

**12V/24V
Dual Voltage/
Commercial with
Polarity & Voltage
Protection**

**Model
2100**

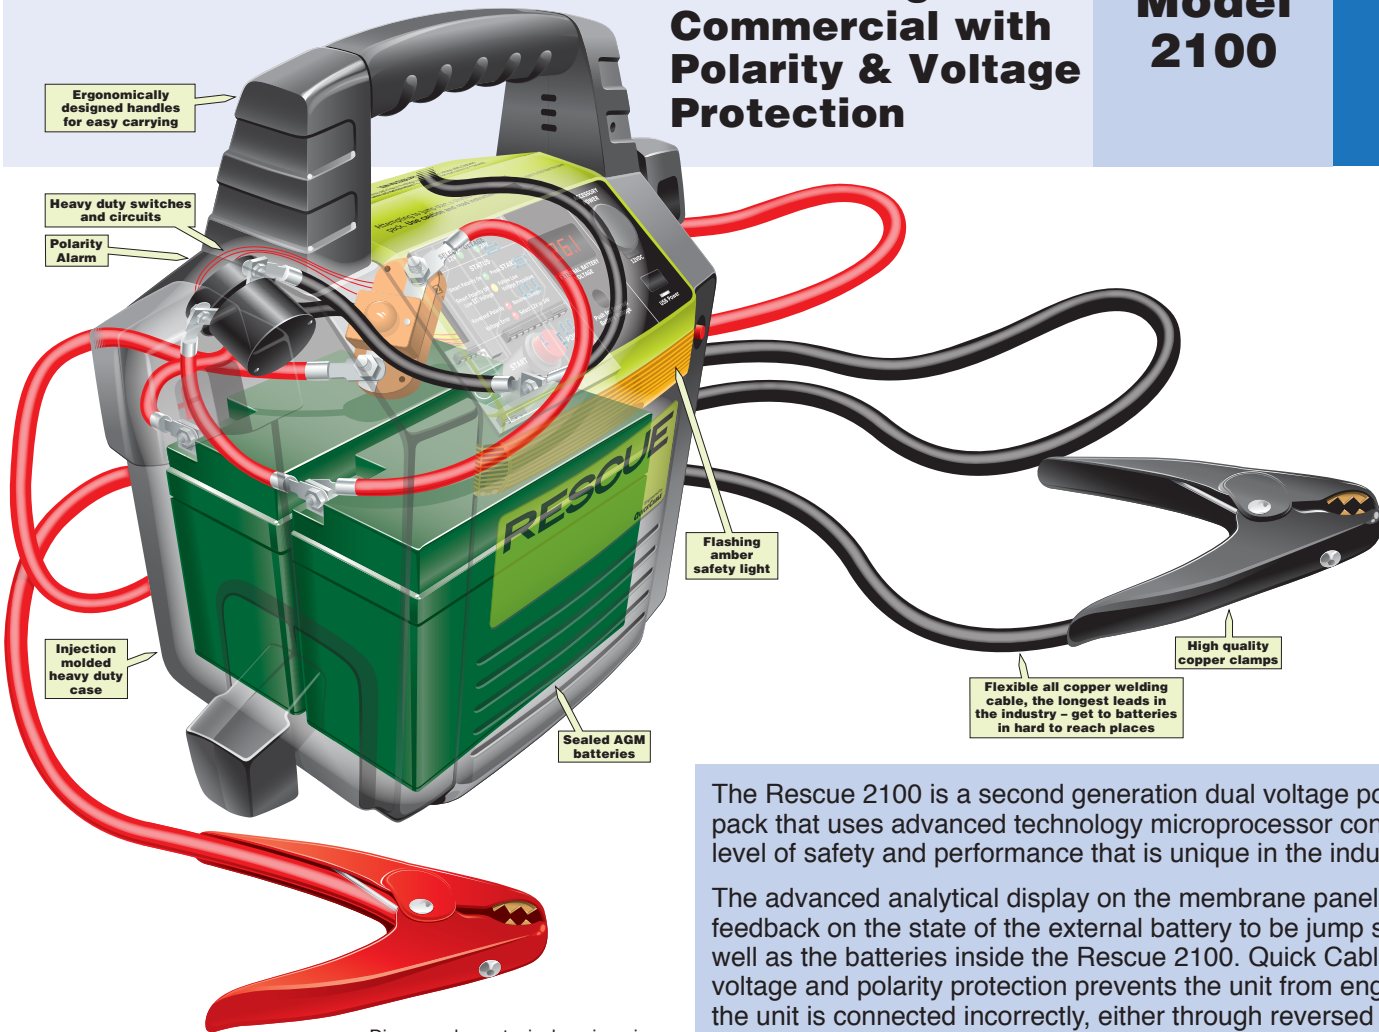


Diagram shows typical engineering components. Individual power packs may differ in features and number of batteries.

The Rescue 2100 is a second generation dual voltage portable power pack that uses advanced technology microprocessor controls to offer a level of safety and performance that is unique in the industry.

The advanced analytical display on the membrane panel provides user feedback on the state of the external battery to be jump started as well as the batteries inside the Rescue 2100. Quick Cable's exclusive voltage and polarity protection prevents the unit from engaging when the unit is connected incorrectly, either through reversed polarity, or incorrect voltage setting. The Rescue 2100 can also be used in very low voltage situations or as a power source for 12V or 24V equipment without the polarity and voltage protection features.

An all-new digital battery meter displays both internal and external battery voltage, and indicates recharging and fully-charged internal batteries. LED's signal system voltage selection, low internal battery voltage, low voltage situations and reversed polarity. A 12V cigarette-style power outlet protected by an internally-resetting 15 amp circuit breaker, and a USB charging port are both provided. A selectable worklight/safety flasher is built in. Like all Rescue portable power packs, the 2100 comes with a built-in battery charger. The 62" booster cables are all-copper welding cable to stay flexible even in subzero temperatures and feature heavy duty parrot clamps. With 4000 peak amps at 12V, the 2100 offers commercial-grade power for cars, trucks and commercial equipment in a hand-carried package, and Quick Cable backs it with a 12 month limited warranty.

QUICKCABLE